



DTR-xxx-3.3-SM-T

3.3 Volt Single Mode Transceivers (1x9 pin-out)



Features

- ☑ Single +3.3 V supply & LV-PECL data interface
- ☑ Designed for SONET/SDH OC-3 to OC-12 (156 Mb/s & 622 Mb/s)
- ☑ Long Reach 1310 nm & 1550 nm as well as Intermediate Reach
- ☑ Eye Safe (Class I Laser Safety)
- ☑ - 40°C to +85°C Operating Temperature
- ☑ Multi-sourced 1x9 package style
- ☑ Duplex SC or ST or FC connector
- ☑ Conductive Plastic or Metal packages
- ☑ Wave Solder Process Compatible
- ☑ Signal Detect-LVTTL

Description

The DTR-xxx-3.3-SM-T fiber optic transceivers are the 3.3V power supply versions of our standard DTR-xxx-SM fiber optic transceivers. They offer a simple, convenient way to interface PCBs to single mode fiber optic cables. Many performance versions are available which are fully compliant with SONET/SDH standards from OC-3 to OC-12 for both Long Reach (1310 nm & 1550 nm) and Intermediate Reach specifications. All modules satisfy Class I Laser Safety requirements in accordance with the US FDA/CDRH and international IEC-825 standards.

The transmit and receive functions are contained in a single one-row, 9-pin (1x9) package with a Duplex SC or ST or FC connector interface. The transmitter

incorporates a highly reliable 1300 nm or 1550 nm InGaAsP Laser and a driver circuit which converts Pseudo Emitter Coupled Logic (PECL) data to light. The receiver features a transimpedance amplifier IC with internal AGC for high sensitivity and wide dynamic range. A Signal Detect status output is also provided. The Signal Detect output interface is direct-coupled LVTTL Logic. The transceiver operates from a single +3.3V power supply over an operating temperature range of 0°C to +70°C ("Blank" option) or -40°C to +85°C ("A" option). The transceiver package is made of either *conductive plastic* (Duplex-SC version) with blue color or metal (FC and ST version) for excellent EMI shielding.

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	T_{st}	- 40	+ 85	°C
Operating Case Temperature	"A" option	- 40	+ 85	°C
	"B" option	0	+ 70	
Supply Voltage	V_{CC}	0	+ 5.0	V
Input Voltage	V_{in}	0	V_{CC}	V
Output Current	I_O	-	50	mA
Lead Soldering Temperature & Time	-	-	260°C, 10 sec	

Optical Communication Products, Inc.

www.DataSheet4U.com

21738-0008, Rev.A

5-10-02
www.DataSheet4U.com

OC-3/STM-1 Single Mode Transceiver: DTR-156-3.3-SM-T

Transmitter Performance Characteristics (over Operating Case Temperature)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	50	156	300	Mb/s
Average Optical Output Power (coupled into single mode fiber), 50% duty cycle	L0	P_o	- 5.0	- 3.0	0	dBm
	L1		- 8.0	- 5.0	- 2.0	
	L2		- 12.0	- 8.0	- 5.0	
	L3		- 15.0	- 11.0	- 8.0	
Extinction Ratio		P_{hi}/P_{lo}	10	-	-	dB
Center Wavelength	IR (Intermediate Reach)	λ_c	1261	1310	1360	nm
	LR1 (Long Reach 1310 nm)		1270	1310	1360	
	LR2 (Long Reach 1550 nm)		1480	1550	1580	
Spectral Width (RMS)	LR1 & IR	$\Delta\lambda_{RMS}$	-	-	3	nm
Spectral Width (-20 dB)	LR2	$\Delta\lambda_{20}$	-	-	1	
Side Mode Suppression Ratio	LR2	$SMSR$	30	-	-	dB
Optical Rise and Fall Time (10% to 90%)		t_r, t_f	-	1	2	ns
Optical Output Eye	compliant with Telcordia GR-253 and ITU-T Recommendation G.957					

Receiver Performance Characteristics (over Operating Case Temperature)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	50	156	266	Mb/s
Receiver Sensitivity (10^{-10} BER) ¹	IR	P_{min}	- 29.0	- 31.0	-	dBm
	LR1 or LR2		- 34.0	- 36.0	-	
Maximum Input Optical Power (10^{-10} BER) ¹		P_{max}	- 7.0	0	-	dBm
Signal Detect Thresholds	Increasing Light Input	P_{sd+}	-	-	- 31.0	dBm
			IR	-	-	
	LR1 or LR2	-	-	- 34.0		
Decreasing Light Input		P_{sd-}	- 45.0	-	-	
Signal Detect Hysteresis		-	1.0	-	-	dB
Signal Detect Timing Delay	Increasing Light Input	t_{sd+}	-	-	100	μ s
	Decreasing Light Input	t_{sd-}	-	-	100	
Wavelength of Operation		λ	1100	-	1600	nm

¹ Specified in Average Optical Input Power and measured at 1300 nm wavelength (1550 nm for LR2 option) with $2^{23}-1$ PRBS. The Receiver Sensitivity is specified at 156 Mb/s with a minimum eye opening of 1.3 ns.

Ordering Information

DTR - 156 - 3.3 - SM - XX - T - Ln - DR - T

Receptacle	Temperature Range	Light Output Option	Distance Option
Blank: SC Receptacle	Blank: 0°C to +70°C	L0: - 3 dBm (typ.)	<i>specifies the range for Center Wavelength & Spectral Width to be compliant with SONET/SDH standard</i>
ST : ST Receptacle	A : - 40°C to +85°C	L1: - 5 dBm (typ.)	
FC : FC Receptacle		L2: - 8 dBm (typ.)	
		L3: - 11 dBm (typ.)	
			IR : IR-1 / S-4.1 " 21/15 km
			LR1 : LR-1 / L-4.1 " 50/40 km
			LR2 : LR-2 / L-4.2 " 100/80 km

NOTES

- The DTR-156-3.3-SM-xx-T-L3-IR-T modules are fully compliant with OC-3/STM-1 Intermediate Reach / S-1.1 standard.
- The DTR-156-3.3-SM-xx-A-L0-LR1-T & DTR-156-3.3-SM-xx-L0-LR1-T modules are fully compliant with OC-3/STM-1 Long Reach 1310 nm / L-1.1 standard.
- The DTR-156-3.3-SM-xx-A-L0-LR2-T & DTR-156-3.3-SM-xx-L0-LR2-T are fully compliant with OC-3/STM-1 Long Reach 1550 nm / L-1.2 standard. Both modules use DFB lasers. However, the DTR-156-3.3-SM-xx-A-L0-LR2-T is specified only over - 25°C to +70°C.
- The LR2 options are available only with DFB lasers and L0 optical output power level.
- These are target distances to be used for classification and not for specification, per ITU-T Recommendation G.957.

OC-12/STM-4 Single Mode Transceiver: DTR-622-3.3-SM-T

Transmitter Performance Characteristics (over Operating Case Temperature)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	50	622	700	Mb/s
Average Optical Output Power (coupled into single mode fiber), 50% duty cycle	HP	P_o	- 3.0	- 1.0	+2.0	dBm
	L0		- 5.0	- 3.0	0	
	L1		- 8.0	- 5.0	- 2.0	
	L2		- 12.0	- 8.0	- 5.0	
	L3		- 15.0	- 11.0	- 8.0	
Extinction Ratio	SR & IR	P_{hi}/P_{lo}	8.2	-	-	dB
	LR1 & LR2		10	-	-	
Center Wavelength ¹	SR (Short Reach)	λ_c	1261	1310	1360	nm
	IR (Intermediate Reach)		1274	1310	1356	
	LR1 (Long Reach 1310 nm)		1293	1310	1334	
	LR2 (Long Reach 1550 nm)		1280	1310	1335	
Spectral Width (RMS) ¹	SR (Short Reach)	$\Delta\lambda_{RMS}$	-	-	4.0	nm
	IR (Intermediate Reach)		-	-	2.5	
Spectral Width (-20 dB)	LR1 & LR2	$\Delta\lambda_{20}$	-	-	1.0	
Side Mode Suppression Ratio	LR1 & LR2	$SMSR$	30	-	-	dB
Optical Rise and Fall Time (10% to 90%)		t_r, t_f	-	0.5	1.0	ns
Optical Output Eye	compliant with Telcordia GR-253 and ITU-T Recommendation G.957					

¹ For Intermediate Reach version, the Center Wavelength is either $1274 \text{ nm} \leq \lambda_c \leq 1356 \text{ nm}$ for $\Delta\lambda_{RMS} \leq 2.5 \text{ nm}$ or $1293 \text{ nm} \leq \lambda_c \leq 1334 \text{ nm}$ for $\Delta\lambda_{RMS} \leq 4.0 \text{ nm}$.

Receiver Performance Characteristics (over Operating Case Temperature)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	50	622	700	Mb/s
Receiver Sensitivity (10^{-10} BER) ¹		P_{min}	- 28.0	- 31.0	-	dBm
Maximum Input Optical Power (10^{-10} BER) ¹		P_{max}	- 7.0	0	-	dBm
Signal Detect Thresholds	Increasing Light Input	P_{sd+}	-	-	- 29.0	dBm
	Decreasing Light Input	P_{sd-}	- 45.0	-	-	
Signal Detect Hysteresis		-	0.5	1.5	-	dB
Signal Detect Timing Delay	Increasing Light Input	t_{sd+}	-	-	100	μs
	Decreasing Light Input	t_{sd-}	-	-	100	
Wavelength of Operation		λ	1100	-	1600	nm

¹ Specified in Average Optical Input Power and measured at 622 Mb/s and 1300 nm wavelength (1550 nm for LR2 option) with $2^{23}-1$ PRBS.

Ordering Information

DTR - 622 - 3.3 - SM - XX - T - Ln - DR - T

<p>Receptacle</p> <p>Blank: SC Receptacle</p> <p>ST : ST Receptacle</p> <p>FC : FC Receptacle</p>	<p>Temperature Range</p> <p>Blank: 0°C to +70°C</p> <p>A : - 40°C to +85°C</p>	<p>Light Output Option</p> <p>HP: - 1 dBm (typ.)</p> <p>L0: - 3 dBm (typ.)</p> <p>L1: - 5 dBm (typ.)</p> <p>L2: - 8 dBm (typ.)</p> <p>L3: - 11 dBm (typ.)</p>	<p>Distance Option</p> <p>specifies the range for Center Wavelength & Spectral Width to be compliant with SONET/SDH standard</p> <p>SR : SR-1 / I-4 distance 12/2 km</p> <p>IR : IR-1 / S-4.1 " 21/15 km</p> <p>LR1 : LR-1 / L-4.1 " 42/40 km</p> <p>LR2 : LR-2 / L-4.2 " 85/80 km</p>
--	---	--	---

NOTES

- The DTR-622-3.3-SM-xx-T-L3-IR-T modules are fully compliant with OC-12/STM-4 Intermediate Reach / S-4.1 standard.
- The DTR-622-3.3-SM-xx-T-HP-LR-T modules are fully compliant with OC-12/STM-4 Long Reach 1310 nm / L-4.1 standard. They use DFB lasers to satisfy the requirement for Center Wavelength & Spectral Width.
- The DTR-622-3.3-SM-xx-T-HP-LR2-T modules are fully compliant with OC-12/STM-4 Long Reach 1550 nm / L-4.2 standard. Both modules use DFB lasers. However, the DTR-622-3.3-SM-xx-A-HP-LR2-T is specified only over - 25°C to +70°C.
- The LR1 & LR2 options are available only with DFB lasers and HP optical output power level.
- These are target distances to be used for classification and not for specification, per ITU-T Recommendation G.957.

DTR-xxx-3.3-SM-T

Transmitter Electrical Interface (over Operating Case Temperature Range)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Input HIGH Voltage	V_{IH}	$V_{CC} - 1.165$	-	$V_{CC} - 0.700$	V
Input LOW Voltage	V_{IL}	$V_{CC} - 1.950$	-	$V_{CC} - 1.475$	V
Data Input Current - HIGH	I_H	-	-	350	μA
Data Input Current - LOW	I_L	-	-	250	μA

Receiver Electrical Interface (over Operating Case Temperature Range)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Output HIGH Voltage (DATA)	V_{OH}	$V_{CC} - 1.165$	-	$V_{CC} - 0.70$	V
Output LOW Voltage (DATA)	V_{OL}	$V_{CC} - 1.950$	-	$V_{CC} - 1.50$	V
Output HIGH Voltage (SIGNAL DETECT)	V_{OH}	2.4	-	V_{CC}	V
Output LOW Voltage (SIGNAL DETECT)	V_{OL}	0	-	0.8	V
Output Current (DATA)	I_O	-	-	25	mA

Electrical Power Supply Characteristics (over Operating Case Temperature Range)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Supply Voltage	V_{CC}	3.13	3.3	3.47	V
Supply Current ¹	TX	$I_{CC,TX}$	110	130	mA
	RX	$I_{CC,RX}$	70	100	mA

¹ Supply current does not include termination resistor current.

Application Notes


Transmitter: When the DATA+ input is at logic HIGH and DATA- input is at logic LOW, the LD is ON; and vice versa. In single-ended applications, the unused input pin should be biased to $V_{CC} - 1.29$ V.

The transmitter incorporates an Average Power Control (APC) loop to stabilize the transmitter average optical output power against temperature variation. The APC loop always acts to keep the transmitter average optical output power at a constant value. Therefore, when the input data is all continuous “zeroes” or all continuous “ones”, the transmitter optical output power is a constant level equal to the nominal average optical output power (not at the “OFF” level or at the “ON” level).

Receiver: Both differential DATA+ and DATA- outputs are PECL levels requiring termination (50 ohms to $V_{CC} - 2$ volts or 160 ohms to GND is recommended). For optimum performance, both outputs should be terminated in the same manner, even if only one is used.

The Signal Detect circuit monitors the level of the incoming optical signal and generates a logic LOW signal when insufficient photocurrent is produced. The SIGNAL DETECT output is LVTTTL and do not need any termination.

Interface circuit: The power supply line should be well-filtered. All 0.1 μF power supply bypass capacitors should be as close to the DTR transceiver module as possible. The two front GND posts should be grounded to Circuit Ground or Chassis Ground. The termination resistors for the Transmitter should be close to the DTR transceiver module. The termination resistors for the Receiver should be close to the PHY or SERDES device (which receives the DATA outputs from the Receiver).

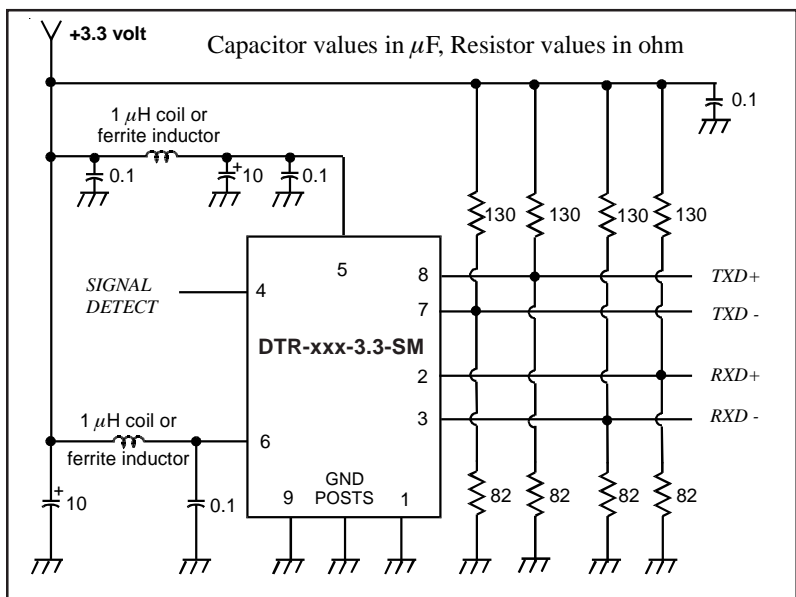

Contents

Description 1
Absolute Maximum Ratings 1
OC-3/STM-1 Single Mode Transceiver: DTR-156-3.3-SM-T 2
OC-12/STM-4 Single Mode Transceiver: DTR-622-3.3-SM-T 3
Transmitter Electrical Interface (over Operating Case Temperature Range) 4
Receiver Electrical Interface (over Operating Case Temperature Range) 4
Electrical Power Supply Characteristics (over Operating Case Temperature Range) 4
Application Notes 4
Duplex SC Receptacle Package 5
FC Receptacle Package 5
ST Receptacle Package 5