
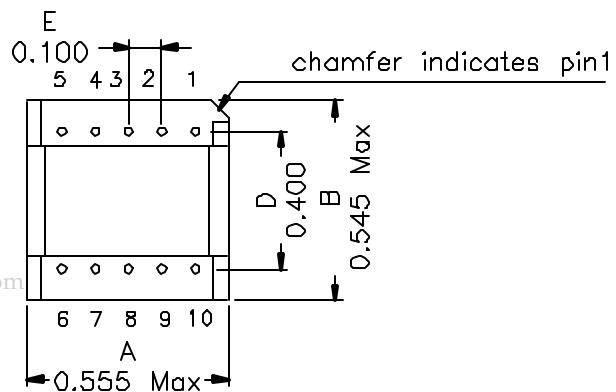
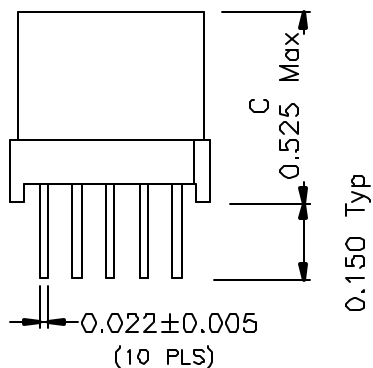


### 1. Mechanical Dimensions:




(BOTTOM VIEW)

Note: Designed to meet UL1950 for supplementary insulation, 250 working volts.

DOC. REV: A/2

### 2. Schematic:

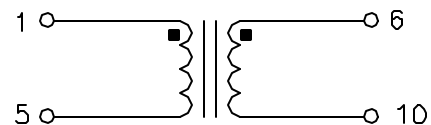

### 3. Electrical Specifications:

Turns Ratio: 1-5:6-10 1:1

Isolation Voltage: 850VAC

OCL: P1-5 2.91mH±10% 10KHz 0.1V 0/200mAdc

DC Res.: 1-5 3.86 Ohms Max

6-10 3.86 Ohms Max

www.DataSheet4U.com

<b>XFMRS Inc</b>	Title: <b>ADSL Inductor</b>	
	P/N: XF0033-AD4	REV. A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	DWN. 康玉坤	Aug-12-00
	CHK. 李清儿	Aug-12-00
Scale 1.5:1 SHT 1 OF 1	APP. BW	www.DataSheet4U.com Aug-12-00