

**SM520C THRU SM560C****GW****5.0 AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS****FEATURES**

- \* Ideal for surface mount applications
- \* Easy pick and place
- \* Built-in strain relief
- \* Low forward voltage drop

**MECHANICAL DATA**


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Metallurgically bonded construction
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.21 grams

**VOLTAGE RANGE**

20 to 60 Volts

**CURRENT**

5.0 Ampere

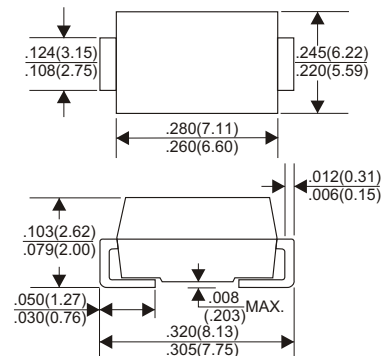**DO-214AB(SMC)**

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

TYPE NUMBER	SM520C	SM530C	SM540C	SM550C	SM560C	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	V
Maximum RMS Voltage	14	21	28	35	42	V
Maximum DC Blocking Voltage	20	30	40	50	60	V
Maximum Average Forward Rectified Current						
At $T_L=90^\circ\text{C}$	5.0					A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	175					A
Maximum Instantaneous Forward Voltage at 5.0A	0.55		0.70			V
Maximum DC Reverse Current $T_a=25^\circ\text{C}$	0.5					mA
at Rated DC Blocking Voltage $T_a=100^\circ\text{C}$	20					mA
Typical Junction Capacitance (Note1)	300					pF
Typical Thermal Resistance R <sub>JL</sub> (Note 2)	10					°C/W
Operating Temperature Range $T_j$	-65 — +125					°C
Storage Temperature Range $T_{stg}$	-65 — +150					°C

**NOTES:**

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Lead.

## RATING AND CHARACTERISTIC CURVES (SM520C THRU SM560C)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

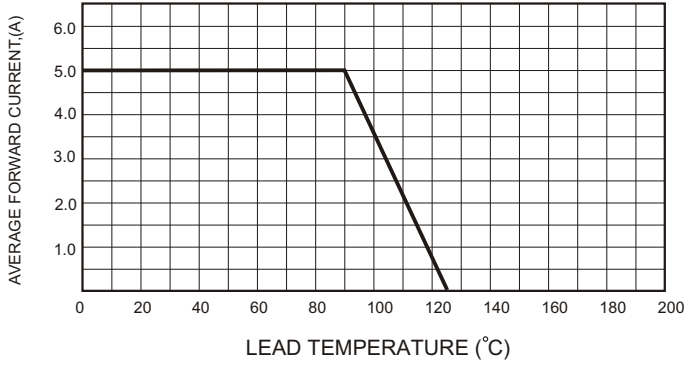


FIG.2-TYPICAL FORWARD CHARACTERISTICS

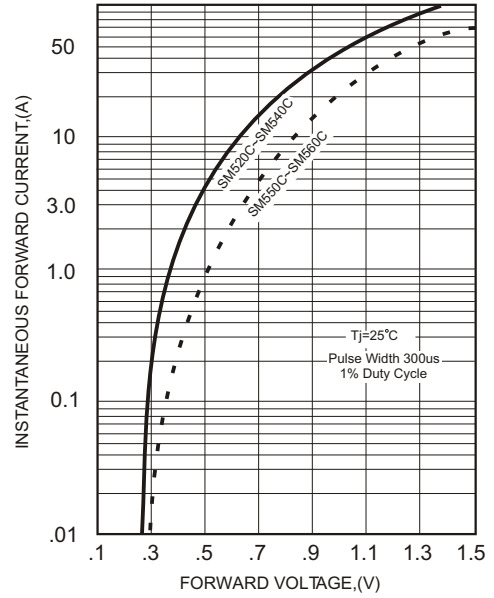


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

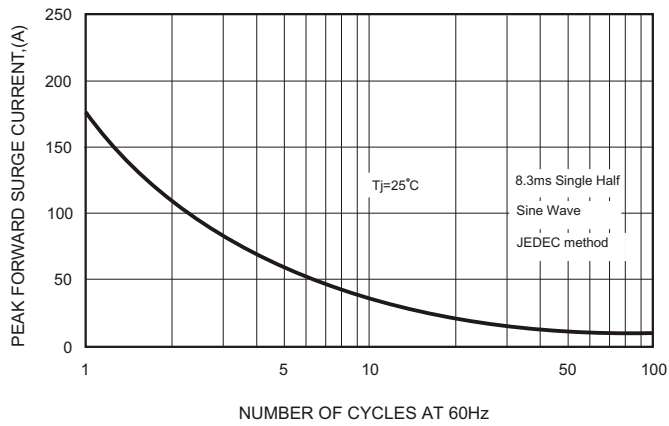


FIG.4-TYPICAL JUNCTION CAPACITANCE

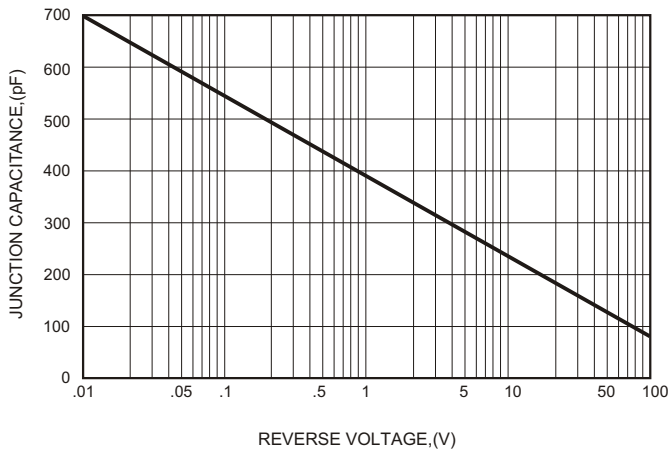


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

